


S-Band Radar Pallet

Part number IBP2931MH270 is a 50 Ω matched high power pulsed radar pallet amplifier for S-Band radar systems operating over the instantaneous bandwidth of 2.9-3.1 GHz. The pallet amplifier supplies a minimum of 270 watts of peak pulse power under the conditions of 100 μ s pulse width and 10% duty cycle. All devices are 100% screened for large signal RF parameters.

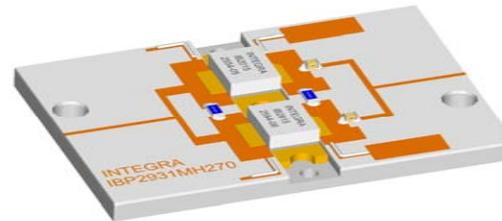

Silicon Bipolar

- Ultra-high f_T

Class C Operation

- High Efficiency

Common Base Configuration

- Single Power Supply

Gold Metal

- Maximum Reliability

Emitter Ballasting

- Optimum Thermal Distribution

Impedance Matched to 50 Ω

- Ease of Use

Pallet Carrier

- Ni Plated Copper Carrier
- High Er PCB

BeO Based Transistor Package

- Unmatched Thermal Reliability

US Patent Number

- 6181200B1

TYPICAL DATA

TYPICAL DATA

TYPICAL DATA

TYPICAL DATA


Pallet	Freq (GHz)	V _{CC} (V)	P _{OUT} (W)	IRL (dB)	P _{IN} (W)	G _P (dB)	I _C (A)	n _C (%)	Droop (dB)
D4556-5	2.90	36	319	11	50	8.0	22.18	40	-0.24
	3.00	36	319	19	50	8.0	21.44	41	-0.34
	3.10	36	317	10	50	8.0	18.90	47	-0.18

Pulse Format = 100us, 10%


RF ELECTRICAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	Output Power	P_{OUT}	270	350	W	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3.
100%	Power Gain	G_P	7.5	--	dB	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3.
100%	Collector Efficiency ($P_O/I_C/V_{CC}$)	N_C	35	--	%	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3.
100%	Input Return Loss	IRL	-30	-7	dB	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3.
100%	Pulse Amplitude Droop	D	--	0.7	dB	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3.
100%	Delta Insertion Phase Variation	ΔIP	-20	+20	deg	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3. With respect to an established Phase Reference.
BD	Pulse Rise Time	T_r	--	150	ns	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3. Measure between 10% and 90% detected power points.
100%	Stability into 1.5:1 VSWR	VSWR-S	--	1.5:1	--	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3. Rotate 1.5:1 output VSWR through 360° phase. No oscillatory or pulse break-up characteristics allowed on detected output pulse.
100%	Load Mismatch Tolerance	LMT	--	2:1	--	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3. Rotate 2:1 output VSWR through 360° phase. Survival.
100%	Gain Flatness over Frequency	GF	--	0.8	dB	$V_{CC}=36V$, $P_{IN}=50W$, Pulse = Note 2, $T_F=25\pm 5^\circ C$, F=F1, F2, F3. Calculate from min/max gains
Note 1	F1 = 2.90GHz, F2 = 3.00GHz, F3 = 3.10 GHz.					
Note 2	Pulse format = 100 μ s, 10%					
Note 3	T_F = Pallet base plate temperature.					
Note 4	Screen 'BD' = parameter qualified By Design.					

PALLET DIMENSIONAL OUTLINE DRAWING

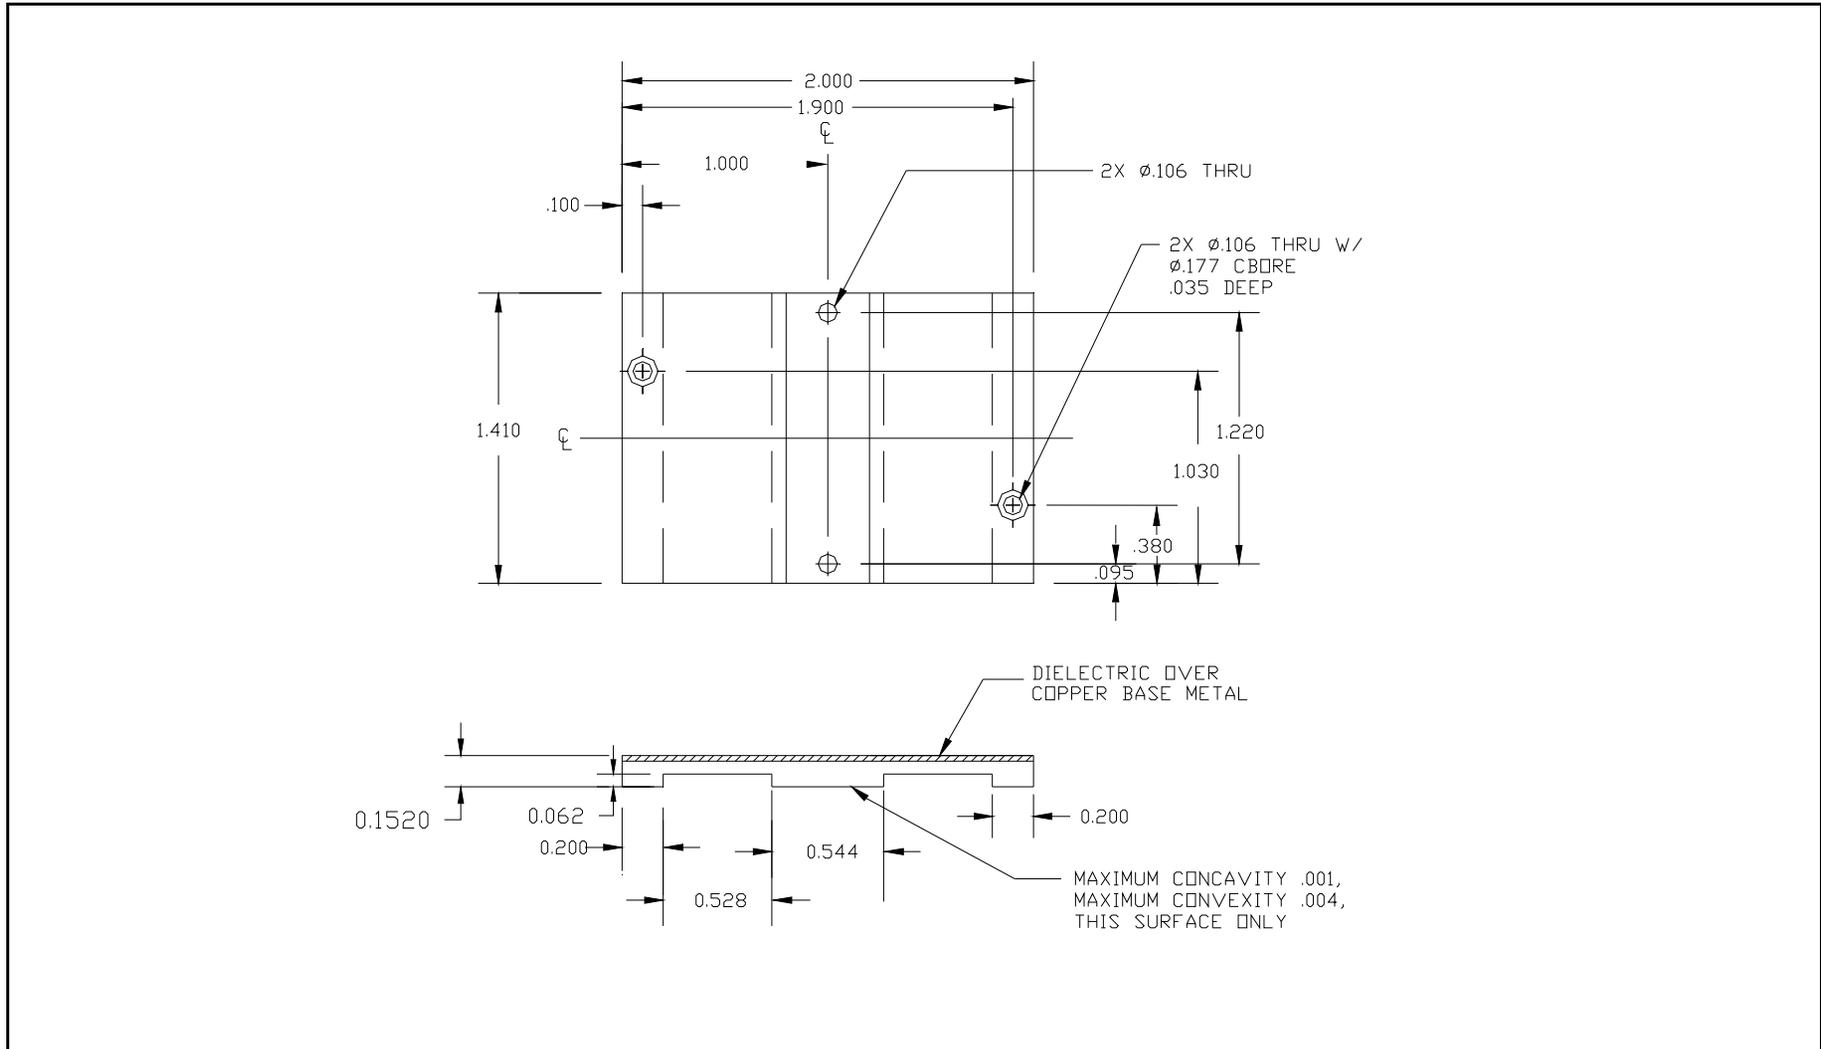

PALLET TEST FIXTURE:

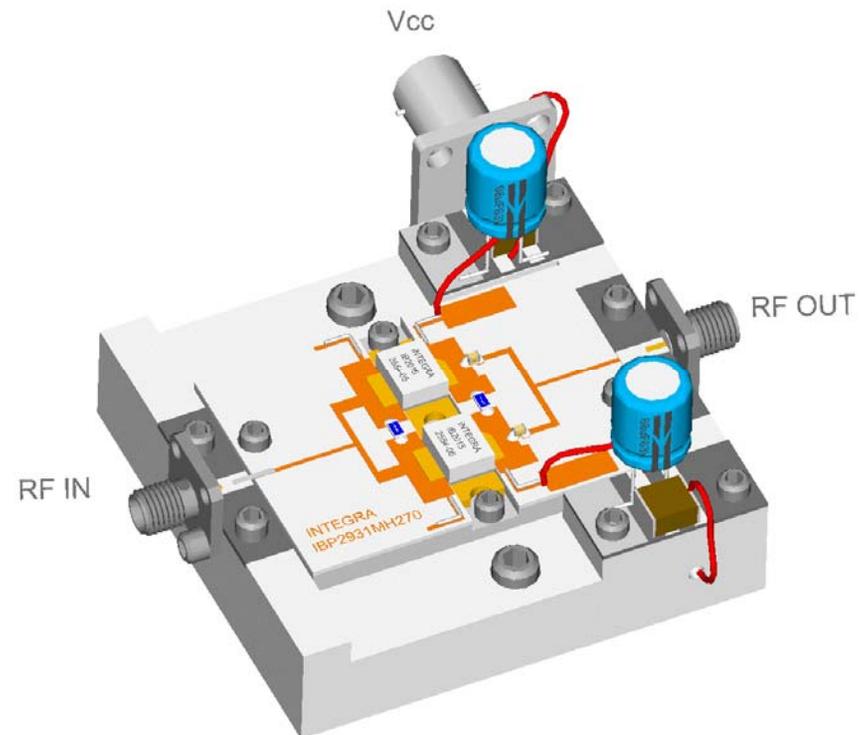

DEFINITIONS

Data Sheet Status	
Proposed Specification	This data sheet contains proposed specifications.
Preliminary Specification	This data sheet contains specifications based on preliminary measurements and data.
Product Specification	This data sheet contains final product specifications.
Maximum Ratings	
Stress above one or more of the maximum ratings may cause permanent damage to the device. These are maximum ratings only and operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to maximum values for extended periods of time may affect device reliability.	

WARNING

Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO base is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with general or domestic waste.

DISCLAIMER

Integra Technologies Inc. reserves the right to make changes without further notice to any products herein. Integra Technologies Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Integra Technologies Inc. assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Integra Technologies Inc. products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Integra Technologies Inc. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Integra Technologies Inc. for any damages resulting from such improper use or sale.
--