


Part Number: ILMP3135M240 (Preliminary)

Integra

TECHNOLOGIES, INC.

S-Band Radar Pallet

Part number ILMP3135M240 is a 50 Ω matched 2-stage high power pulsed radar pallet amplifier for S-Band radar systems operating over the instantaneous bandwidth of 3.10-3.50GHz. The pallet amplifier supplies a minimum of 240 watts of peak pulse power under the conditions of 300 μ s pulse width and 10% duty cycle. All units are 100% screened for large signal RF parameters.

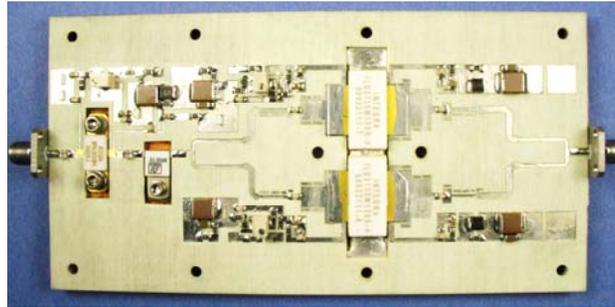

Silicon LDMOS

- Ultra-high f_T

Class AB Operation

Common Source Configuration

Gold Metal

- Maximum Reliability

Impedance Matched to 50 Ω

- Ease of Use

Pallet Carrier

- Nickel Plated Copper Carrier

Maintained

- 100% RF Screening
- No External Tuning Allowed

PRELIMINARY DATA

PRELIMINARY DATA

PRELIMINARY DATA


Freq (GHz)	V _c (V)	P _{in} (W)	IRL (dB)	P _{out} (W)	G _p (dB)	I _D (A)	N _c (%)	Droop (dB)
3.10	32.0	2.50	-10.0	263	20.2	25.83	32	-0.560
3.30	32.0	2.50	-11.0	280	20.5	26.71	33	-0.480
3.50	32.0	2.50	-9.5	274	20.4	23.96	36	-0.450

Pulse format = 300 μ s, 10%

RF ELECTRICAL CHARACTERISTICS

Screen	Parameter	Symbol	Min	Max	Units	Test Conditions
100%	Power Output	P_{out}	240	--	W	$V_{DD}=32V$, P_{IN} = Note 3, $V_{GG}= 8V$, Pulse = Note 1 $T_F=25\pm 5^\circ C$, $F=F1, F2, F3$.
100%	Input Return Loss	IRL	9	--	dB	$V_{DD}=32V$, P_{IN} = Note 3, $V_{GG}= 8V$, Pulse = Note 1, $T_F=25\pm 5^\circ C$, $F=F1, F2, F3$.
100%	Power Gain	G_p	19	--	dB	$V_{DD}=32V$, P_{IN} = Note 3, $V_{GG}= 8V$, Pulse = Note 1, $T_F=25\pm 5^\circ C$, $F=F1, F2, F3$.
100%	Output Power Flatness	OPF	0	1.5	dB	$V_{DD}=32V$, P_{IN} = Note 3, $V_{GG}= 8V$, Pulse = Note 1, $T_F=25\pm 5^\circ C$, $F=F1, F2, F3$.
100%	Pulse Amplitude Droop	Droop	--	1.0	dB	$V_{DD}=32V$, P_{IN} = Note 3, $V_{GG}= 8V$, Pulse = Note 1, $T_F=25\pm 5^\circ C$, $F=F1, F2, F3$. Delta between 10 and 90% time positions.
100%	Stability into VSWR	VSWR-S	3:1	--	--	$V_{DD}=32V$, P_{IN} = Note 3, $V_{GG}= 8V$, Pulse = Note 1, $T_F=25\pm 5^\circ C$, $F=F1, F2, F3$. Rotate 3:1 output VSWR through 360° $F=F1, F2, F3$. No Oscillatory or pulse break-up characteristics allowed all non-harmonically related signals must be at least -65dBc.
100%	Peak Current	I_d	--	30	A	$V_{DD}=32V$, P_{IN} = Note 3, $V_{GG}= 8V$, Pulse = Note 1, $T_F=25\pm 5^\circ C$, $F=F1, F2, F3$.
100%	Delta Insertion Phase	DIP	-20	+20	DEG	$V_{DD}=32V$, P_{IN} = Note 3, $V_{GG}= 8V$, Pulse = Note 1, $T_F=25\pm 5^\circ C$, $F=F1, F2, F3$.
Note 1	Pulse format = 300 μ s, 10%					
Note 2	F1 = 3.10 GHz, F2 = 3.30 GHz, F3 = 3.50 GHz					
Note 3	P_{IN} = 2.50 \pm 0.25W					
Note 4	T_F = Device flange temperature.					

PALLET DIMENSIONAL OUTLINE DRAWING

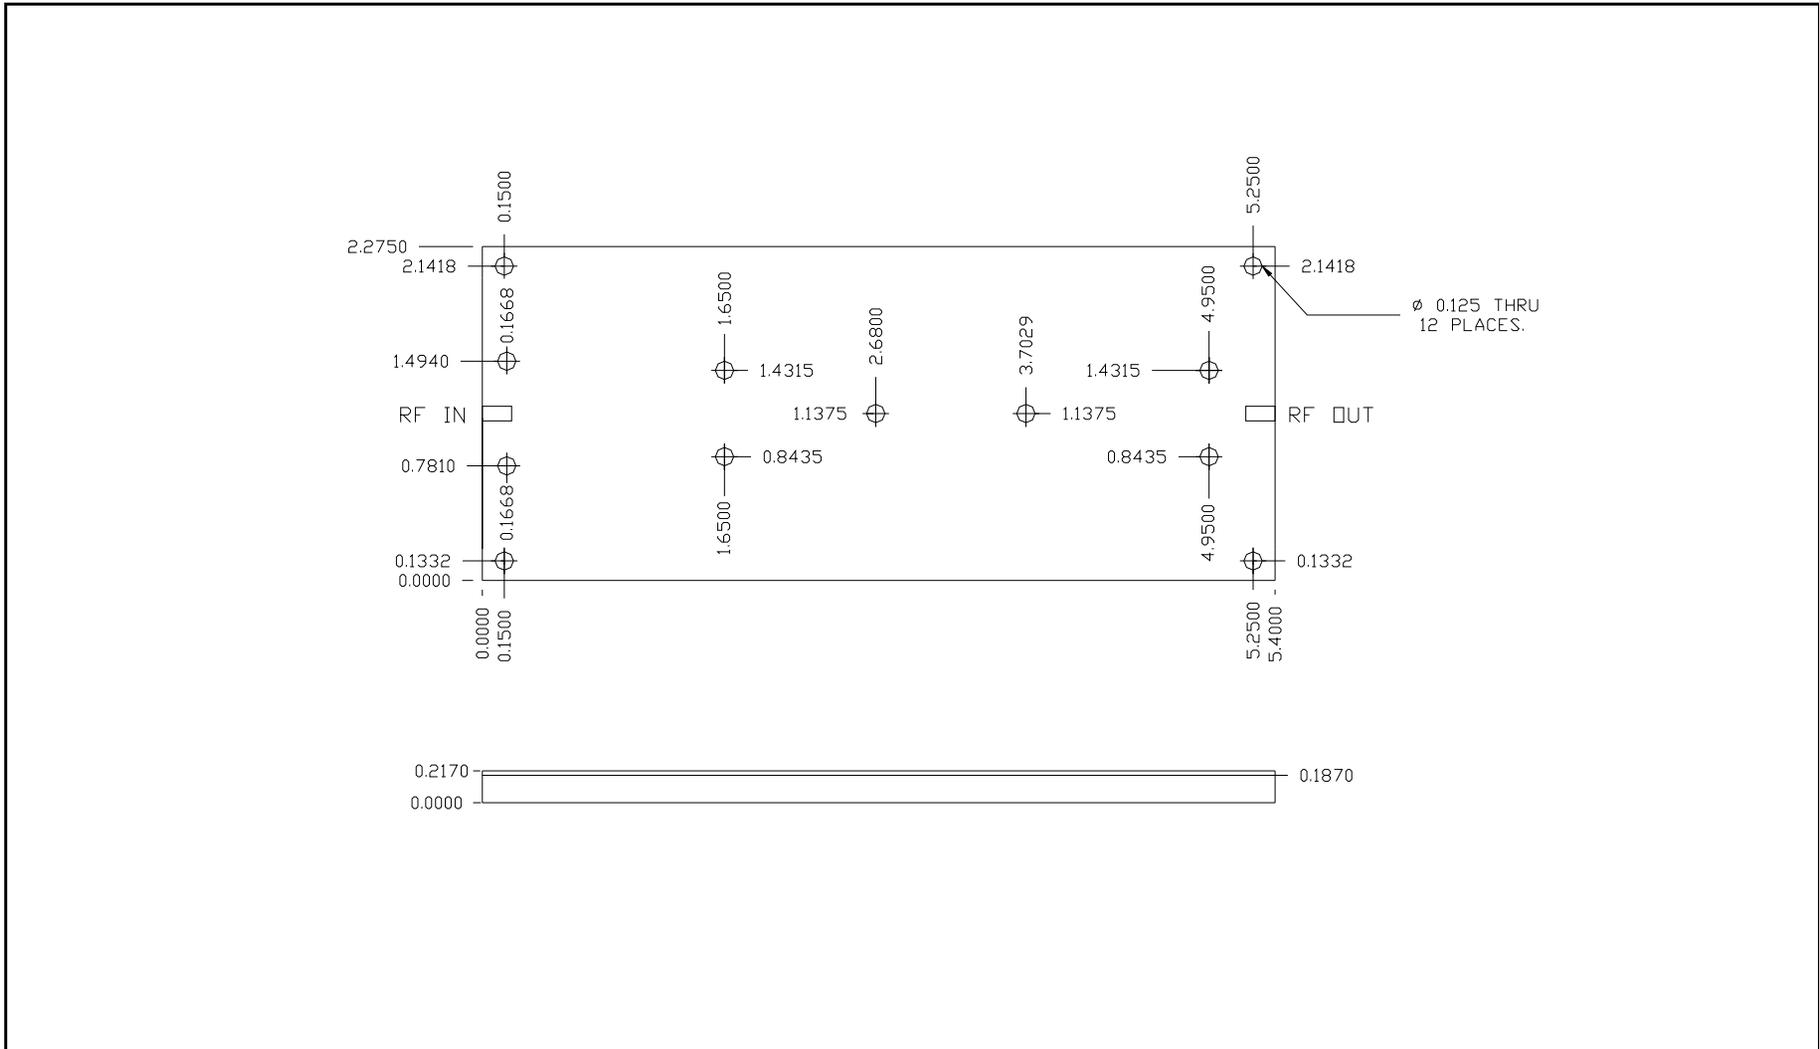

DEFINITIONS

Data Sheet Status	
Proposed Specification	This data sheet contains proposed specifications.
Preliminary Specification	This data sheet contains specifications based on preliminary measurements and data.
Product Specification	This data sheet contains final product specifications.
Maximum Ratings	
Stress above one or more of the maximum ratings may cause permanent damage to the device. These are maximum ratings only and operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to maximum values for extended periods of time may affect device reliability.	

WARNING

Product and environmental safety - toxic materials
This product contains beryllium oxide. The product is entirely safe provided that the BeO base is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with general or domestic waste.

DISCLAIMER

Integra Technologies Inc. reserves the right to make changes without further notice to any products herein. Integra Technologies Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Integra Technologies Inc. assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Integra Technologies Inc. products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Integra Technologies Inc. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Integra Technologies Inc. for any damages resulting from such improper use or sale.
--