

L-Band Avionics Transistor - GaN

- GaN on SiC HEMT Technology
- $P_{OUT-PK} \geq 40W$ @ ELM Mode S / 6.4% / 50V
- 1.025-1.150 GHz Instantaneous Operating Frequency Range
- Internal Impedance Pre-matched Device
- Depletion Mode Device
- Negative Gate Voltage and Bias Sequencing Required
- Specified For Use Under Class AB Operation
- Metal Based Package Sealed With Ceramic-Epoxy Lid
- Gold Metallization System: Chip - Wire Bond - Package
- Package Size: W=0.800" (20.32mm), L=0.230" (5.84mm)
- "S" Package Size: W=0.390" (9.91mm), L=0.230" (5.84mm)
- 100% High Power RF Tested in Broadband RF Test Fixture



PARAMETER	SYM	MIN	TYP	MAX	UNI	TEST CONDITIONS
DC ELECTRICAL SPECIFICATIONS						
Drain Leakage Current	I_{D-OFF}	--	--	0.8	mA	$V_{DS}=50V, V_{GS}=-6V, T_{F1}, S1$
Gate Threshold Voltage	V_{GS-TH}	--	-2.5	--	V	$V_{DS}=50V, I_D=20mA, T_{F1}, BD$
RF ELECTRICAL SPECIFICATIONS						
Input Return Loss	IRL	-18	-12	-10	dB	PIN1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$
Power Output	P_O	40	50	70	W	PIN1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$
Power Gain	Gp	19	21	23	dB	PIN1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$
Drain Efficiency	N_D	55	60	70	%	PIN1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$
Pulse Amplitude Droop	D	-0.40	-0.20	+0.20	dB	PIN1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$
Load Mismatch Stability	VSWR-S	2:1	--	--	--	PO1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$
Load Mismatch Tolerance	LMT	5:1	--	--	--	PO1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$

PARAMETER	SYM	MIN	NOM	MAX	UNITS	NOTES
DC & RF TEST CONDITIONS						
Input Power 1	PIN1	--	0.4	--	W	--
Output Power 1	PO1	--	40	--	W	--
Drain Supply Voltage 1	V1	--	50	--	V	--
Quiescent Drain Current 1	I_{DQ1}	18	20	22	mA	--
Pulse Width 1	PW1	--	*	--	us	--*ELM Mode S, 48 X (32us ON, 18us off), 6.4%
Duty Factor 1	DF1	--	6.4	--	%	--
Frequency 1	F1	--	1.025	--	GHz	--
Frequency 2	F2	--	1.090	--	GHz	--
Frequency 2	F3	--	1.150	--	GHz	--
Flange Temperature 1	T_{F1}	20	25	30	°C	--
Screening Level 1	S1	--	100	--	%	--



PARAMETER	SYM	MIN	MAX	UNITS	SCREEN	CONDITIONS
MAXIMUM RATINGS						
Drain-Source Voltage	V_{DS}	--	120	V	BD	$T_F = 25^{\circ}\text{C}$
Gate-Source Voltage	V_{GS}	-10	0	V	BD	$T_F = 25^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55	+150	$^{\circ}\text{C}$	BD	--
Operating Junction Temperature	T_J	-55	+200	$^{\circ}\text{C}$	BD	--
PROCESS SPECIFICATIONS						
DC Wafer Probe	--	--	--	--	100%	Per Integra Spec
Wafer DC, RF Qualification	--	--	--	--	Q1	Per Integra Spec
Wire Bond Strength	--	--	--	--	LM	Per Integra Spec
Pre-cap Visual Inspection	--	--	--	--	100%	Per Integra Spec
Gross Leak Test – MIL-STD-750D	--	--	--	--	100%	Method 1071.6 C
THERMAL RESISTANCE						
Peak Thermal Resistance Per Rated RF Specification	$R_{TH(JC)}$	--	2.7	$^{\circ}\text{C/W}$	BD	$T_F = 25^{\circ}\text{C}$
SCREENING LEVELS						
Parameter Qualified By Design	BD	--	--	--	--	--
Parameter Qualified By 3 Pieces (min) Per Wafer	Q1	--	--	--	--	--
Parameter Qualified By Assembly Line Monitor	LM	--	--	--	--	--

RF TEST FIXTURE – BROADBAND

► Broadband RF Test Fixture. Provides Device Impedance Matching to 50Ω Across the Rated Operating Frequency Range.

► Electronic CAD Drawing File Available Upon Request. Includes Circuit Dimensions and Parts List.

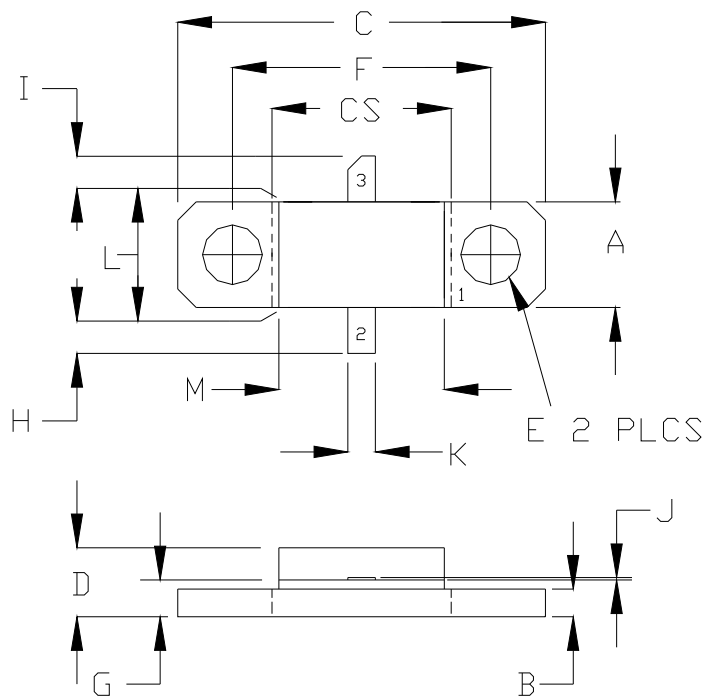
► Reference Design PCB: Rogers RTD6006-02511, DK=6.15.

FREQUENCY (GHz)	$Z_{IF}(\Omega)$	$Z_{OF}(\Omega)$
1.025	3.0 - j 3.0	10.9 - j 4.4
1.090	2.96 - j 2.2	10.5 - j 4.2
1.150	2.85 - j 1.6	10.0 - j 4.1
Impedance Definition		

DC BIAS SEQUENCING

Turn ON GaN Device	Turn OFF GaN Device
1. RF Power OFF 2. Set $V_{GS} = -5\text{V}$ (Negative Voltage to pinch off) 3. Measure V_{DS} impedance, should be pinched off. 4. Turn ON V_{DD} voltage. 5. Slowly increase V_{GS} until bias current I_{DQ} is set. 6. Turn ON RF Power	1. Turn OFF RF Power 2. Turn OFF V_{DD} voltage 3. After V_{DD} is discharged, set $V_{GS} = -5\text{V}$ 4. Turn OFF V_{GS} voltage.

PACKAGE OUTLINE DRAWING



'S' VERSION USE DIM CS

NON 'S' VERSION USE DIM C

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.225	0.235	5.71	5.96
B	0.055	0.065	1.40	1.65
C	0.795	0.805	20.19	20.44
CS	0.385	0.395	9.78	10.03
D	0.140	0.160	3.55	4.06
E	0.125	0.135	3.18	3.43
F	0.557	0.567	14.14	14.40
G	0.077	0.087	1.95	2.20
H	0.093	0.107	2.36	2.72
I	0.093	0.107	2.36	2.72
J	0.004	0.006	0.10	0.15
K	0.055	0.065	1.40	1.65
L	0.225	0.235	5.71	5.96
M	0.355	0.365	9.01	9.27

PIN SCHEDULE	
1	SOURCE
2	GATE
3	DRAIN

DEFINITIONS**DATA SHEET STATUS**

Proposed Specification	This data sheet contains proposed specifications.
Preliminary Specification	This data sheet contains specifications based on preliminary measurements and data.
Product Specification	This data sheet contains final product specifications.

MAXIMUM RATINGS

Stress above one or more of the maximum ratings may cause permanent damage to the device. These are maximum ratings only operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to maximum values for extended periods of time may affect device reliability.

DISCLAIMER

Integra Technologies Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Integra Technologies Inc. assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Integra Technologies Inc. products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Integra Technologies Inc. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Integra Technologies Inc. for any damages resulting from such improper use or sale.